




# EVAHL Series Powered Air-Purifying Respirator Competitive Comparison

877-BULLARD  
www.bullard.com

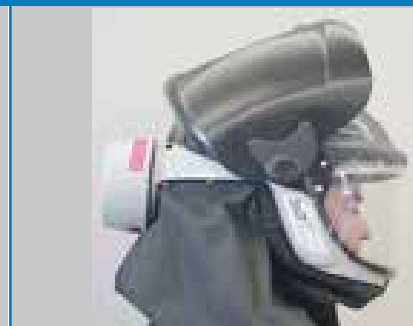

Feature	Bullard EVAHL	3M GVP	Interactive Pureflo
Hazardous Location Rating	Class I, Div 2, Groups A, B, C, D T6 Class II, Div 2, Groups F, G Class III Ta= -40°C to 50°C	Class I, Div 1, Group D Class II, Div 1, Groups E, F, G Class III	Class I, Div 2, Groups A, B, C, D T4 Class II, Div 2, Groups E, F, G Class III Ta= 40°C
Applicable Standard	ANSI/ISA 12.12.01-2007 CSA Certificate 2510928	UL 913 1997	FM Class 3600 1998 FM Class 3611 2004 FM Class 3810 2005
NIOSH Approved with HE Filters	Yes	Yes	Yes
NIOSH Approved with OVAGHE Cartridges	Yes	Yes	No
On-board Battery	Yes	No	Yes
Visual Fuel Gauge	Yes	No	No
External Battery Cable	No	Yes	No
Low Battery Alarm	Yes	No*	Yes
Low Flow Alarm	Yes	No	Yes
Active Flow Technology	Yes	No	No
Air Flow	8.5 CFM/240 LPM 7.0 CFM/200 LPM	≥ 7.0 CFM/200 LPM	8.2 CFM/230 LPM 7.6 CFM/210 LPM
Selectable Two-speed Operation	Yes	No	Yes
Battery Technology	Lithium Polymer	NiCd (NiMH option is not HazLoc rated)	NiMH
Blower & Battery Weight	3.20 lbs	3.6 lbs	3.30 lbs
Weight on the Head	<.25 lbs (assumes hood)	<.25 lbs (assumes hood)	3.30 lbs + filter
APF	1,000	1,000	1,000
Warranty	1 year	90 days	1 year

\*LED on battery indicates low battery.