

POWERUP

Charger, Analyzer, Conditioner

Keep Your Batteries at Peak Performance

What's worse than picking up a tool with a dead battery? Using PowerUp in conjunction with a regular inspection and maintenance process, you can restore or replace non-performing batteries in your inventory before they impact operations. The multi-functional PowerUp keeps your thermal imager batteries in peak condition.




Cost Effective

The PowerUp battery charger, analyzer, and conditioner gives you complete control of your battery inventory at a fraction of the cost of expensive multi-bank commercial products. Many batteries that appear to be non-functional can be restored with advanced conditioning techniques. With PowerUp, you have the power to increase the life of your batteries, improving efficiency while reducing the costs of frequent battery replacements. PowerUp can condition up to four batteries at one time.*

Total Control/Complete Convenience

Used in conjunction with Bullard's personal control panel software, myBullard™, you can add and remove batteries from your inventory with just a few clicks of your mouse. Additionally, myBullard can notify you when an analysis and conditioning cycle is complete by sending you a text or email message. PowerUp can disconnect from the PC and run remotely once started so you have the convenience of using your PC for other tasks.

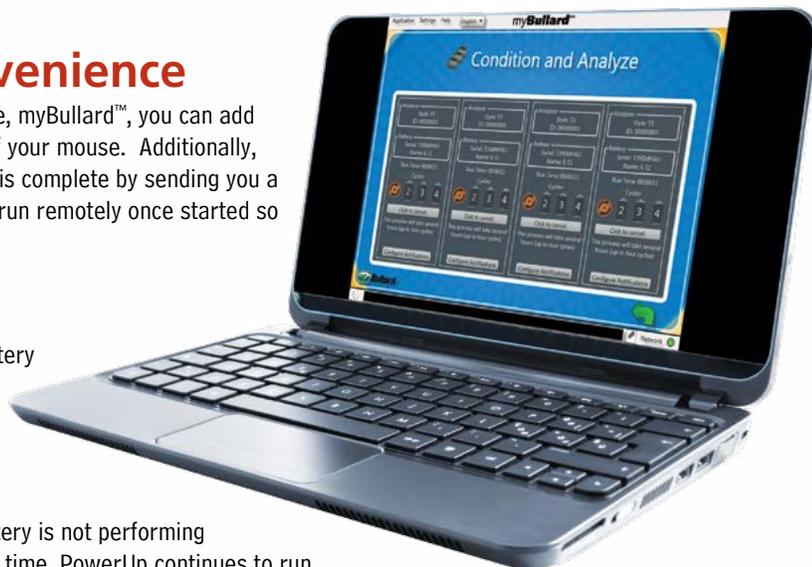

Analysis

Using myBullard, PowerUp first analyzes your thermal imager battery to determine its condition. PowerUp automatically uses this information to determine if battery conditioning is required.

Conditioning

If, after analyzing your battery, PowerUp determines that the battery is not performing optimally, it will begin a conditioning cycle to increase battery run time. PowerUp continues to run analysis and conditioning sequences until it can either no longer increase battery performance or determines that the battery is bad.

Charging

In addition to its analysis and conditioning capabilities, PowerUp can also charge batteries, so there is no need for a separate desktop charger.

PowerUp works with all T3 Series, T4 Series, Eclipse® Series, Edge™ Series, and TacSight® Series Thermal Imager batteries.

* Requires a separate PowerUp unit for each additional simultaneous process.

Bullard
TOUGH

 **Bullard**®

www.bullard.com

POWERUP

Technical Specifications

DC Input:	20.0V @ 1A maximum
USB:	2.0 Compatible
T3POWERUP Compatible with:	T3NIMH, NIMH, T3NIMHULTRA, T3NIMHB, T3NIMHC, NFPANIMH
ECLPOWERUP Compatible with:	ECLNIMH, ECLNIMHB

myBullard PowerUp Module

PowerUp works as a module within myBullard personal control panel software. With PowerUp, you take complete control of your battery inventory through the easy-to-use, powerful graphical user interface.

Main Menu



PowerUp has several capabilities that enable you to manage your battery inventory, enter notification preferences, and condition and analyze.

Manage Battery Inventory Menu



In the Manage Battery Inventory Menu, you can visually see your battery inventory and status, name your batteries, see a history of battery test results, and add and remove batteries from inventory.

Notification Preferences Menu



Via the Notification Preferences Menu, you can configure PowerUp to send you an email and/or text notification upon completion of an event, such as conditioning and analysis.

Add a Battery to Inventory



Adding a battery to inventory is a short, simple process.

Americas:
Bullard
1898 Safety Way
Cynthiana, KY 41031-9303 • USA
Toll-free within USA: 877-BULLARD (285-5273)
Tel: +1-859-234-6616
Fax: +1-859-234-8987

Europe:
Bullard GmbH
Lilienthalstrasse 12
53424 Remagen • Germany
Tel: +49-2642 999980
Fax: +49-2642 9999829

Asia-Pacific:
Bullard Asia Pacific Pte. Ltd.
LHK Building
701, Sims Drive, #04-03
Singapore 387383
Tel: +65-6745-0556
Fax: +65-6745-5176

©2013 Bullard. All rights reserved.
Eclipse and TacSight are registered trademarks of Bullard.
Edge and myBullard are trademarks of Bullard.

8481 (0413)