

Attaching IZ3/FP3 Goggle to the Bullard UST, FX or PX Helmet:

- Step 1: Remove chin strap anchor blocks using a Phillips head screwdriver.
- Step 2: Remove inner shell from helmet.
- Step 3: To install the goggle, take the attachment key on Nomex® strap and fold down against strap so that it lies flat on top of strap (Figure 1).
- Step 4: Insert the attachment key between the inner shell and the liner in rear of the liner assembly. (The attachment key resembles the suspension keys that are already in place around the liner.)
- Step 5: Insert the liner assembly back into the helmet by aligning the mark on the helmet with the arrow on the back of the inner shell and push together.
- Step 6: Reassemble chin strap with anchor blocks onto helmet by using screws and spacers provided (in place of faceshield bracket if replacing a faceshield).
- Step 7: Remove protective cover from lens.
- Step 8: Place the goggles on the front of the helmet by bringing them under the front brim and pulling them up to their rest position above the brim.

Placing Goggle on the Face:

- Step 1: Pull down over front brim of helmet.
- Step 2: Place goggle over eyes.
- Step 3: Pull end of straps to tighten (Figure 2).
- To loosen the goggle pull out on goggle speed clips (Figure 2).



Contamination and Decontamination



Special precautions must be taken if your protective helmet becomes contaminated with chemical or biological hazardous materials. The guidance for these precautions should be coordinated with the appropriate (local, state, and federal) authorities having jurisdiction for hazardous materials (HAZMAT).

Contaminated helmet ensembles should be isolated, contaminate(s) identified, and bodily contact should be avoided. Avoid spreading the contamination to interior spaces of buildings or vehicles, any living quarters, or personal belongings. If possible, seal the contaminated ensemble in a leak proof, sealable, air tight container. Disposal should be done in adherence to local, state, and federal laws. If the helmet is to be reused, it **MUST** be decontaminated before reuse. Decontamination should be performed using procedures established by decontamination professionals that will remove contaminate(s) while minimizing damage or compromise to the helmet. Failure to do so could result in increased risk of injury, illness, disease, or death.

Store goggles in a cool, dry place away from direct sunlight.

CAUTION

This goggle should be installed only on Bullard helmets which meet the structural fire fighting protective helmet requirements of NFPA 1971. Removing the faceshield from any other NFPA helmet will void NFPA certification. Failure to observe these instructions may result in minor or moderate injury and/or equipment damage.

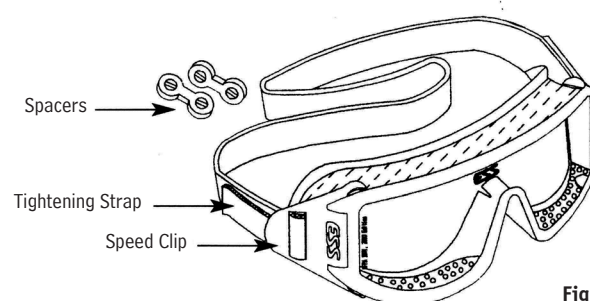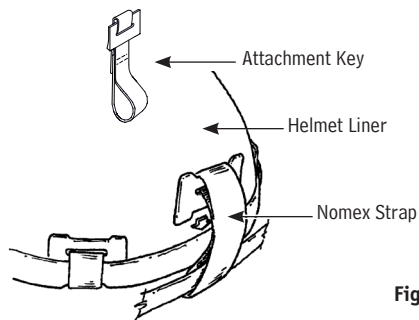

▲ WARNING

The Bullard IZ2, FP2, FP3 and IZ3, are the **only** goggles approved for use on Bullard firefighting helmets! Use of any other goggle will void the helmet's NFPA certification and could result in death or serious injury.

READ ALL INSTRUCTIONS AND WARNINGS BEFORE USING THIS PRODUCT. ONLY THE END USER MAY SEPARATE THIS MANUAL FROM THE ELEMENT. MANUAL MUST BE REMOVED PRIOR TO PUTTING THE HELMET INTO SERVICE. PLEASE SAVE THIS MANUAL FOR FUTURE REFERENCE.

Ordering Information/Replacment Parts

CATALOG NUMBER	DESCRIPTION
	IZ3 ESS Innerzone 3 Fire Helmet Goggle <ul style="list-style-type: none"> • NFPA 1971 Certified • 1 piece wrap around strap • Anti-scratch/anti-fog lens • Speed clip quick adjust system
	EL3 NFWA Certified Lenses <ul style="list-style-type: none"> • 10 per package
	ET 6PK Tear off Lenses <ul style="list-style-type: none"> • 6 per package
	FP3 ESS FirePro Goggles <ul style="list-style-type: none"> • NFPA 1971 Certified • 1 piece wrap around strap • Anti-scratch/anti-fog lens • Speed clip quick adjust system
EL3-FP	NFWA Certified Lenses <ul style="list-style-type: none"> • 10 per package
ETFP-6PK	Tear off Lenses <ul style="list-style-type: none"> • 6 per package

Americas:
Bullard
 1898 Safety Way
 Cynthiana, KY 41031-9303 • USA
 Toll-free within the USA: 877-BULLARD (285-5273)
 Tel: +1-859-234-6616
 Fax: +1-859-234-8987

Europe:
Bullard GmbH
 Lilienthalstrasse 12
 53424 Remagen • Germany
 Tel: +49-2642 999980
 Fax : +49-2642 9999829

Asia-Pacific:
Bullard Asia Pacific Pte. Ltd.
 LHK Building
 701, Sims Drive, #04-03
 Singapore 387383
 Tel: +65-6745-0556
 Fax: +65-6745-5176



©2018 Bullard. All rights reserved.
 Nomex is a registered trademark of E.I.
 du Pont de Nemours
 and Company.